

Dubbellagrade kulventiler, fullt genomlopp

154xx1/40/TR serie, PN 40, fläns / fläns, DN 150-900, fullt genomlopp

Ventilhus	DN 150-400 Stål, P355QH (1.0571) / P355NL1 (1.0566) / P355NH (1.0565)
	DN 450-900 Stål, P355QH (1.0571) / P355NH (1.0565)
Kula	DN 150-900 Stål + rostfritt plätterad, ASTM A350 LF2 +Ni
Kültätning	DN 150-900 PTFE+C
Spindel	DN 150-900 Rostfritt stål, X17CrNi16-2 (1.4057)
Spindeltätning	DN 150-900 FPM
Manövrering	DN 150-900 Ventil utrustad med manuell växel
Fläns	EN 1092-1 Tillgänglig PN 16, 25, 40
Tillbehör	DN 150-900 är utrustad lyftöglor, monteringsstativ, Dräneringsventil: DN 15 för DN 125-150 ventiler, DN 20 för DN 200-400 ventiler, DN 32 för DN 450-1200 ventiler




Funktionsvillkor

0 °C - +200 °C

Under 0 °C kontakta tillverkaren


Lägsta tillåtna omgivningstemperatur -20°C

Läckageklass A (EN 12266-1)

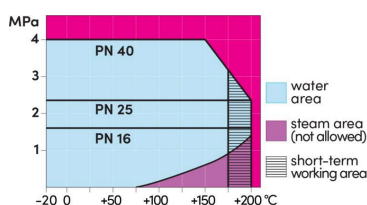


Ej för ånga

DN 150-900

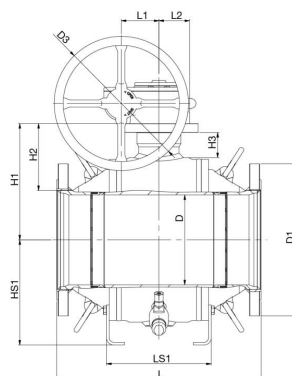

DN 150-900

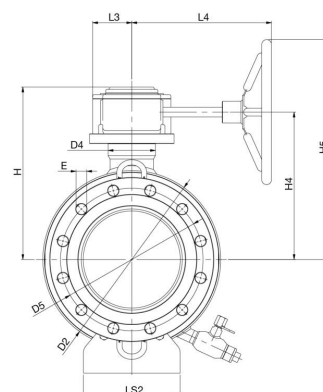

DN	PN	Product no.	D	D1	D2	D3	D4	D5	E	H	H1	H2	H3	H4	H5	HS1	L	L1	L2	L3	L4	LS1	LS2	kg
150	40	154150/40/TR	150	168.3	315.0	300.0	98.0			331	234	150	57	279	429	200	457	84	69	81	289	229	160	143.0
200	40	154201/40/TR	201	375.0	368.0	300.0	98.0	320.0	30	357	260	150	56	305	455	235	457	84	69	81	289	234	200	209.0
250	40	154251/40/TR	250	450.0	440.0	500.0	110.0	385.0	33	420	302	164	62	351	601	280	533	118	108	125	363	250	240	327.0
300	40	154301/40/TR	300	515.0	510.0	500.0	110.0	450.0	33	455	337	174	62	386	636	314	610	118	108	125	363	290	280	474.0
350	40	154351/40/TR	340	580.0	590.0	500.0	135.0	510.0	36	528	400	221	80	455	705	360	686	138	133	150	440	348	320	748.0
400	40	154401/40/TR	385	660.0	640.0	500.0	135.0	585.0	39	553	425	220	80	480	730	390	762	138	133	150	440	362	350	922.0
450	40	154451/40/TR	436	685.0	740.0	600.0	180.0	610.0	39	625	490	262	86	554	854	390	914	180	167	188	487	456	400	1183.0
500	40	154501/40/TR	487	755.0	822.0	500.0	200.0	670.0	42	672	537	283	88	601	851	580	991	180	166	188	540	472	420	1514.0
600	40	154601/40/TR	589	890.0	980.0	700.0	200.0	795.0	48	805	616	311	88	701	1051	660	1143	253	222	255	593	524	450	2534.0
700	40	154701/40/TR	684	995.0	1125.0	700.0	230.0	900.0	48	910	722	366	111	807	1157	700	1346	253	222	255	593	572	450	3665.0
800	40	154801/40/TR	779	1140.0	1290.0	700.0	270.0	1030.0	56	1095	833	426	138	971	1321	840	1524	292	306	306	757	700	600	5547.0
900	40	154901/40/TR	874	1250.0	1440.0	700.0	270.0	1140.0	56	1170	908	451	138	993	1396	900	1727	292	306	306	757	770	600	7027.0

För mer information kontakta vår kundtjänst.

Storlek DN 450-900 tillverkade av ARMATURY Group a.s. – ingår i Vexve.