

# Injusteringsventiler, rostfritt stål, reducerat genomlopp

fläns / fläns, DN 65-150, reducerat genomlopp

|                |                                                                    |
|----------------|--------------------------------------------------------------------|
| Ventilhus      | DN 65-150 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)                 |
| Kula           | DN 65-150 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)                 |
| Kultätning     | DN 65-150 PTFE+GF                                                  |
| Spindel        | DN 65-150 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)                 |
| Spindeltätning | DN 65-150 FPM/NBR                                                  |
| Mätuttag       | DN 65-150 Typ Oras, rostfritt stål, X2CrNiMo17-12-2 (1.4404) / NBR |
| Manövrering    | DN 65-150 Med förzinkat stål handtag                               |
| Fläns          | EN 1092-1<br>Tillgänglig PN 10, 16, 25, 40                         |




## Funktionsvillkor

-20 °C - +200 °C

Under -20 °C kontakta tillverkaren


Lägsta tillåtna omgivningstemperatur -40°C

Läckageklass A (EN 12266-1)

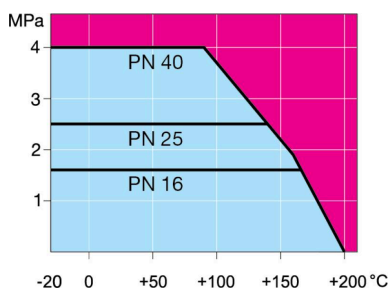

Ej för ånga

DN 65-150

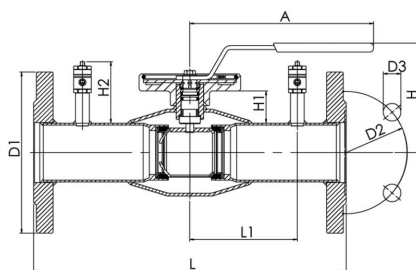


| DN  | PN | Product no. | A   | D1    | D2    | D3   | H   | H1 | H2 | L   | L1    | kg   |
|-----|----|-------------|-----|-------|-------|------|-----|----|----|-----|-------|------|
| 65  | 16 | 266510V     | 280 | 185.0 | 145.0 | 18.0 | 148 | 58 | 82 | 310 | 110   | 10.1 |
| 80  | 16 | 266511V     | 280 | 200.0 | 160.0 | 18.0 | 160 | 64 | 82 | 310 | 110   | 12.0 |
| 100 | 16 | 266512V     | 280 | 220.0 | 180.0 | 18.0 | 173 | 52 | 82 | 350 | 122.5 | 15.9 |
| 125 | 16 | 266513V     | 400 | 250.0 | 210.0 | 18.0 | 221 | 68 | 82 | 355 | 137.5 | 25.6 |
| 150 | 16 | 266514V     | 600 | 285.0 | 240.0 | 22.0 | 240 | 74 | 82 | 370 | 150   | 30.0 |

Vexves injusteringsventiler finns i biblioteken i TA-SCOPE och SmartBalancing-mätton, bland annat.


# Injusteringsventiler, rostfritt stål, reducerat genomlopp

fläns / fläns, DN 200-250, reducerat genomlopp


|                |                                                                     |
|----------------|---------------------------------------------------------------------|
| Ventilhus      | DN 200-250 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)                 |
| Kula           | DN 200-250 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)                 |
| Kultätning     | DN 200-250 PTFE+GF                                                  |
| Spindel        | DN 200-250 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)                 |
| Spindeltätning | DN 200-250 FPM/NBR                                                  |
| Mätuttag       | DN 200-250 Typ Oras, rostfritt stål, X2CrNiMo17-12-2 (1.4404) / NBR |
| Manövrering    | DN 200-250 Ventil utrustad med manuell växel                        |
| Fläns          | EN 1092-1<br>Tillgänglig PN 10, 16, 25, 40                          |

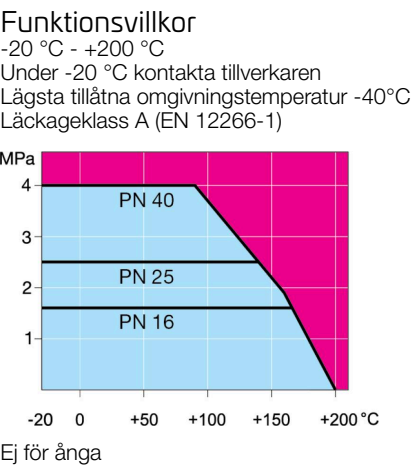

DN 200-300



DN 200-300

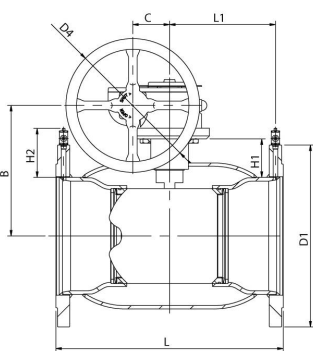

| DN  | PN | Product no. | A   | B   | C  | D1    | D2    | D3   | D4    | E   | H | H1 | H2 | L   | L1  | kg    |
|-----|----|-------------|-----|-----|----|-------|-------|------|-------|-----|---|----|----|-----|-----|-------|
| 200 | 16 | 266536V     | 268 | 244 | 69 | 340.0 | 295.0 | 22.0 | 250.0 | 293 |   | 72 | 92 | 425 | 198 | 56.7  |
| 250 | 16 | 266537V     | 301 | 294 | 97 | 405.0 | 355.0 | 26.0 | 300.0 | 345 |   | 88 | 97 | 550 | 259 | 103.9 |

Vexves injusteringsventiler finns i biblioteken i TA-SCOPE och SmartBalancing-mätdon, bland annat.