


Stålkulventiler, reducerat genomlopp

105 serie, fläns / svetsning, EN (DIN), DN 65-300, reducerat genomlopp

Ventilhus	DN 65-300 Stål, P235GH (1.0345)
Kula	DN 65-300 Rostfritt stål, X5CrNi18-10 (1.4301)
Kultätning	DN 65-300 PTFE+C
Spindel	DN 65-100 Rostfritt stål, X8CrNiS18-9 (1.4305) DN 125-150 Rostfritt stål, X17CrNi16-2 (1.4057) DN 200-300 Rostfritt stål, X8CrNiS18-9 (1.4305)
Spindeltätning	DN 65-300 FPM
Manövrering	DN 65-250 Med förzinkat stål handtag DN 300 Utan handtag
Fläns	EN 1092-1 Tillgänglig PN 10, 16, 25, 40

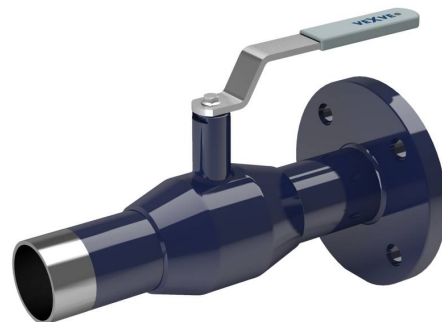


Funktionsvillkor

-20 °C - +200 °C

Under -20 °C kontakta tillverkaren


Lägsta tillåtna omgivningstemperatur -40°C

Läckageklass A (EN 12266-1)

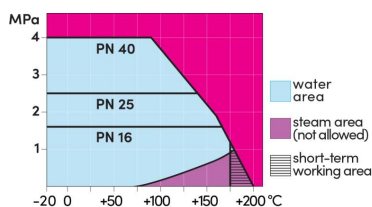


Ej för ånga

DN 65-150

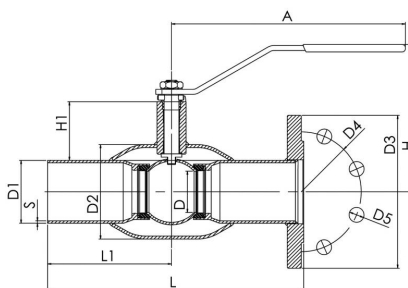

DN 200-300

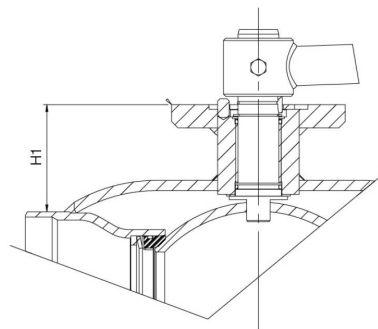

DN	PN	Product no.	RSK no.	A	D	D1	D2	D3	D4	D5	H	H1	L	L1	S	kg
65	16	105065	4506158	278	50	76.1	101.6	185.0	145.0	18.0	157	62	310	150	2.9	7.4
80	16	105080	4506159	278	65	88.9	121.0	200.0	160.0	18.0	170	68	310	150	3.2	9.1
100	16	105100	4506160	279	80	114.3	139.7	220.0	180.0	18.0	216	101	340	163	3.6	12.5
125	16	105125	4506161	400	100	139.7	177.8	250.0	210.0	18.0	251	101	340	163	4	19.0
150	16	105150	4506162	600	125	168.3	219.1	285.0	240.0	22.0	272	107	360	175	4.5	26.0
200	16	105200	4506163	870	150	219.1	273.0	340.0	295.0	22.0	282	92	415	200	4.5	49.0
250	16	105250	4506164	1200	200	273.0	355.6	405.0	355.0	26.0	350	108	540	265	5	88.0
300	16	105300	4506165		250	323.9	457.0	460.0	410.0	26.0		133	560	277.8	5.6	129.0