

Dubbellagrade kulventiler, fullt genomlopp

154/TR serie, svetsning / svetsning, EN (DIN), DN 150-1200, fullt genomlopp

Ventilhus	DN 150-400 Stål, P355QH (1.0571) / P355NL1 (1.0566) DN 450-1200 Stål, P355QH (1.0571) / P355NH (1.0565)
Kula	DN 150-1200 Stål + rostfritt plätterad, ASTM A350 LF2 +Ni
Kultätning	DN 150-1200 PTFE+C
Spindel	DN 150-1200 Rostfritt stål, X17CrNi16-2 (1.4057)
Spindeltätning	DN 150-1200 FPM
Manövrering	DN 150-1200 Ventil utrustad med manuell växel
Strukturell längd	EN 12982 (63-serien)
Tillbehör	DN 150-1200 är utrustad lyftöglor, monteringsstativ, Dräneringsventil: DN 20 för DN 150-400 ventiler, DN 32 för DN 450-1200 ventiler




Funktionsvillkor

0 °C - +200 °C

Under 0 °C kontakta tillverkaren


Lägst tillåtna omgivningstemperatur -20°C

Läckageklass A (EN 12266-1)

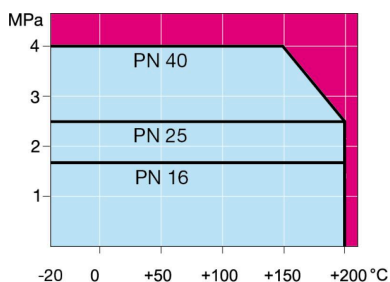


Ej för ånga

DN 150-1200

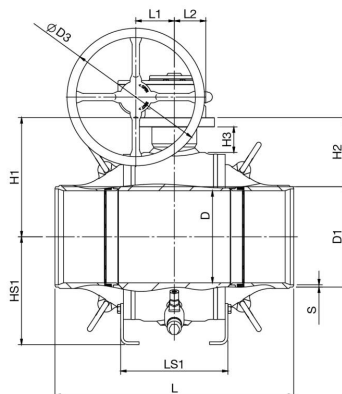

DN 150-1200

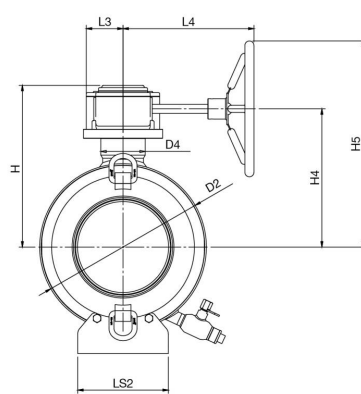

DN	PN	Product no.	D	D1	D2	D3	D4	H	H1	H2	H3	H4	H5	HS1	L	L1	L2	L3	L4	LS1	LS2	S	kg
150	25	154150/TR	150	168.3	315.0	300.0	98.0	331	234	150	57	279	429	200	457	84	69	81	289	229	160	4,5	141.0
200	25	154200/TR	201	219.1	368.0	300.0	98.0	357	260	150	56	305	455	235	521	84	69	81	289	234	200	5	179.0
250	25	154250/TR	250	273.0	440.0	500.0	110.0	420	302	166	62	351	601	280	559	118	108	125	363	250	240	5	274.0
300	25	154300/TR	300	323.9	510.0	500.0	110.0	455	337	175	62	386	636	314	635	118	108	125	363	290	280	5,6	392.0
350	25	154350/TR	340	355.6	590.0	500.0	135.0	528	400	222	80	455	705	360	762	138	133	141	440	348	320	6,3	642.0
400	25	154400/TR	385	406.4	640.0	500.0	135.0	553	425	222	80	480	730	390	838	138	133	141	440	362	260	7,1	763.0
450	25	154450/TR	436	457.0	740.0	600.0	180.0	625	490	262	86	554	854	390	914	180	167	188	487	456	400	6,3	1057.0
500	25	154500/TR	487	508.0	822.0	600.0	200.0	672	537	283	88	601	901	580	991	180	166	188	487	472	420	6,3	1333.0
600	25	154600/TR	589	610.0	980.0	500.0	200.0	751	616	311	88	680	930	660	1143	253	166	188	540	524	450	7,1	2145.0
700	25	154700/TR	684	711.0	1125.0	700.0	230.0	910	722	366	111	807	1157	700	1346	253	222	255	593	572	450	8	3340.0
800	25	154800/TR	779	813.0	1290.0	700.0	270.0	1021	833	426	138	918	1268	840	1524	253	222	255	593	700	600	8,8	4978.0
900	25	154900/TR	874	914.0	1440.0	700.0	270.0	1096	908	451	138	993	1343	900	1727	253	222	255	593	770	600	10	6391.0
1000	25	1541000/TR	976	1016.0	1600.0	700.0	290.0	1273	1010	502	156	1148	1498	970	1870	291	306	306	757	876	750	11	9052.0
1200	25	1541200/TR	1166	1220.0	1910.0	700.0	300.0	1428	1165	555	156	1303	1653	1120	2216	292	306	306	763	1000	900	12,5	14610.0

Finns även i PN 40. För mer information kontakta vår kundtjänst.

Storlek DN 450-1200 tillverkade av ARMATURY Group a.s. – ingår i Vexve Armatury Group.