

Underjordiska kulventiler, fullt genomlopp

157 serie, svetsning / svetsning, EN (DIN), DN 150-400, fullt genomlopp

Ventilhus	DN 150-350 Stål, P235GH (1.0345) DN 400 Stål, P355 NL1 (1.0566)/ GP240GH (1.0619)
Kula	DN 150-400 Rostfritt stål, X5CrNi18-10 (1.4301)
Kultätning	DN 150-400 PTFE+C
Spindel	DN 150-400 Rostfritt stål, X8CrNiS18-9 (1.4305)
Spindeltätning	DN 150-400 FPM
Topp av spindel	DN 150-400 Rostfritt stål, X5CrNi18-10 (1.4301)




Funktionsvillkor
-20 °C - +200 °C
Under -20 °C kontakta tillverkaren
Lägsta tillåtna omgivningstemperatur -40°C
Läckageklass A (EN 12266-1)



Ej för ånga

DN 150-400

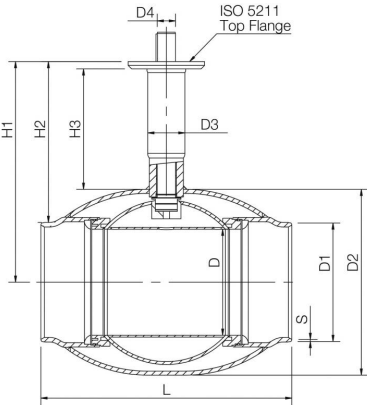

DN	PN	Product no.	D	D1	D2	D3	D4	H1	H2	H3	L	S	kg
150	25	157150/S/F12	150	168.3	273.0	76.1	35.0	490	406	334	400	4,5	62.0
200	25	157200/S/F14	200	219.1	355.6	76.1	40.0	525	415	327	530	5	105.0
250	25	157250/S/F16	250	273.0	457.0	88.9	50.0	580	443	331	550	5	143.0
300	25	157300	290	323.9	508.0	114.3	50.0	603	440	329	686	5,6	167.0
350	25	157350	340	355.6	610.0	168.3	70.0	680	502	350	762	6,3	308.0
400	25	157400	390	406.0	660.0	178.0	90.0	720	516	350	1100	7,1	570.0