

Injusteringsventiler, rostfritt stål, reducerat genomlopp

240 serie, svetsning / svetsning, EN (DIN), DN 65-150, reducerat genomlopp

Ventilhus	DN 65-150 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Kula	DN 65-150 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Kultätning	DN 65-150 PTFE+GF
Spindel	DN 65-150 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Spindeltätning	DN 65-150 FPM/NBR
Mätuttag	DN 65-150 Typ Oras, rostfritt stål, X2CrNiMo17-12-2 (1.4404) / NBR
Manövrering	DN 65-150 Med förzinkat stål handtag




Funktionsvillkor

-20 °C - +200 °C

Under -20 °C kontakta tillverkaren


Lägst tillåtna omgivningstemperatur -40°C

Läckageklass A (EN 12266-1)

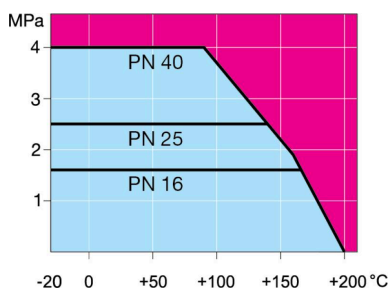

Ej för ånga

DN 65-150

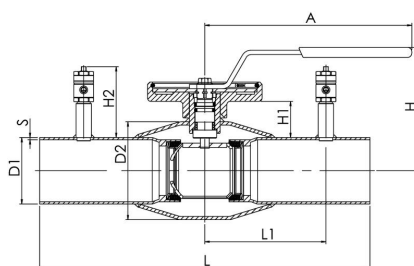

DN	PN	Product no.	RSK no.	A	D1	D2	H	H1	H2	L	L1	S	kg
65	25	240065	4891347	280	76.1	114.3	154	52	82	300	110	3	4.4
80	25	240080	4891348	280	88.9	114.3	166	58	82	300	110	3	5.4
100	25	240100	4891349	280	114.3	139.7	173	52	82	325	122.5	3	7.7
125	25	240125	4891350	400	139.7	178.0	221	68	82	325	137.5	4	15.5
150	25	240150	4891351	600	168.3	219.1	240	74	82	350	150	4	16.1

Vexves injusteringsventiler finns i biblioteken i TA-SCOPE och SmartBalancing-mättdon, bland annat.

Injusteringsventiler, rostfritt stål, reducerat genomlopp


240 serie, svetsning / svetsning, EN (DIN), DN 200-250, reducerat genomlopp

Ventilhus	DN 200-250 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Kula	DN 200-250 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Kultätning	DN 200-250 PTFE+GF
Spindel	DN 200-250 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Spindeltätning	DN 200-250 FPM/NBR
Mätuttag	DN 200-250 Typ Oras, rostfritt stål, X2CrNiMo17-12-2 (1.4404) / NBR
Manövrering	DN 200-250 Ventil utrustad med manuell växel




Funktionsvillkor

-20 °C - +200 °C
Under -20 °C kontakta tillverkaren
Lägsta tillåtna omgivningstemperatur -40°C
Läckageklass A (EN 12266-1)

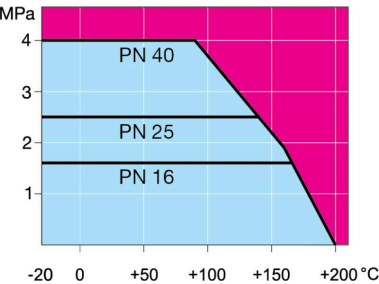


Ej för ånga

DN 200-300



DN 200-300



DN	PN	Product no.	RSK no.	A	B	C	D1	D2	D3	E	H	H1	H2	L	L1	S	kg
200	25	240200	4891352	269	244	69	219.1	273.0	250.0	293		72	132	400	180	4	38.2
250	25	240250	4500417	301	294	97	273.0	355.6	300.0	345		88	132	530	225	4	73.6

Vexves injusteringsventiler finns i biblioteken i TA-SCOPE och SmartBalancing-mätdon, bland annat.