


Kondensatventiler, reducerat genomlopp

174xx1/25 serie, PN 25, fläns / fläns, DN 125-150, reducerat genomlopp


Ventilhus	DN 125-150 Stål, P235GH (1.0345)
Kula	DN 125-150 Rostfritt stål, X5CrNi18-10 (1.4301)
Kultätning	DN 125-150 PTFE+GF
Spindel	DN 125-150 Rostfritt stål, X8CrNiS18-9 (1.4305)
Spindeltätning	DN 125-150 KALREZ/EPDM
Manövrering	DN 125-150 Ventil utrustad med manuell växel
Fläns	EN 1092-1
	Tillgänglig PN 10, 16, 25, 40




Funktionsvillkor
DN 15-150: -20 °C – +250 °C
Under -20 °C kontakta tillverkaren
Lägsta tillåtna omgivningstemperatur -40°C
) Ej för överhettad ånga
Läckageklass A (EN 12266-1)

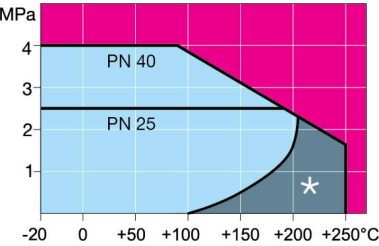

DN 125-250

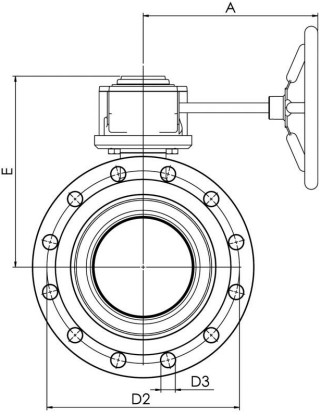

DN 125-250

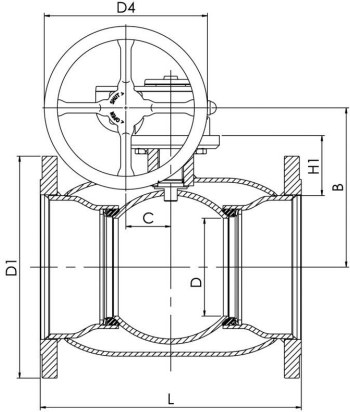

DN	PN	Product no.	A	B	C	D	D1	D2	D3	D4	E	H1	L	kg
125	25	174126/25	224	216	53	100	270.0	220.0	26.0	200.0	258	112	325	35.0
150	25	174151/25	224	236	53	125	300.0	250.0	26.0	200.0	279	118	350	44.0