


Rostfria ståkulventiler, reducerat genomlopp

234xx1 serie, fläns / fläns, DN 100-250, reducerat genomlopp

Ventilhus	DN 100-250 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Kula	DN 100-250 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Kultätning	DN 100-250 PTFE+C
Spindel	DN 100-250 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Spindeltätning	DN 100-250 FPM/NBR
Manövrering	DN 100-250 Ventil utrustad med manuell växel
Fläns	EN 1092-1
	Tillgänglig PN 10, 16, 25, 40




Funktionsvillkor
-20 °C - +200 °C
Under -20 °C kontakta tillverkaren
Lägsta tillåtna omgivningstemperatur -40°C
Läckageklass A (EN 12266-1)

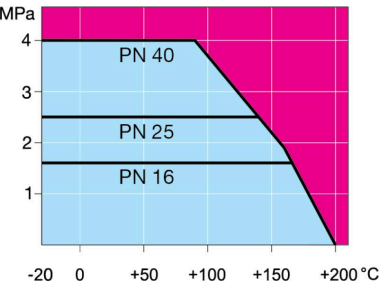


Ej för ånga

DN 100-250

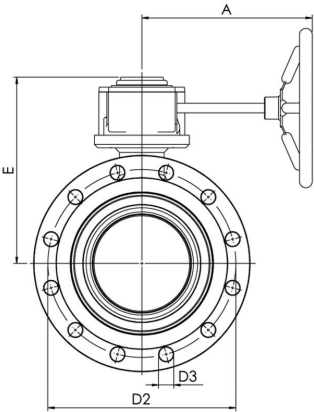

DN 100-250

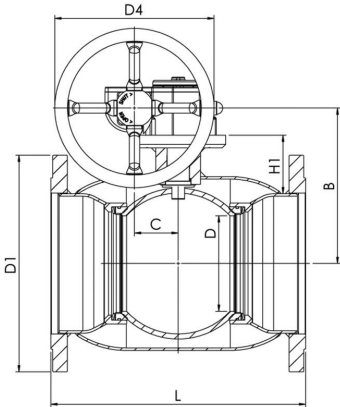

DN	PN	Product no.	RSK no.	A	B	C	D	D1	D2	D3	D4	E	H1	L	kg
100	16	234101	4500637	187	159	53	80	220.0	180.0	18.0	125.0	202	68	300	21.0
125	16	234126	4500638	224	183	53	100	250.0	210.0	18.0	200.0	225	79	325	29.0
150	16	234151	4500381	224	203	53	125	285.0	240.0	22.0	200.0	246	85	350	34.0
200	16	234201	4500382	268	244	69	150	340.0	295.0	22.0	250.0	293	92	400	57.0
250	16	234251	4500639	301	294	97	200	405.0	355.0	26.0	300.0	345	108	550	105.0