


Rostfria ståkulventiler, reducerat genomlopp

233 serie, fläns / fläns, DN 65-250, reducerat genomlopp

Ventilhus	DN 65-250 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Kula	DN 65-250 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Kultätning	DN 65-250 PTFE+C
Spindel	DN 65-250 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Spindeltätning	DN 65-250 FPM/NBR
Manövrering	DN 65-250 Med förzinkat stål handtag
Fläns	EN 1092-1
	Tillgänglig PN 10, 16, 25, 40




Funktionsvillkor
-20 °C - +200 °C
Under -20 °C kontakta tillverkaren
Lägst tillåtna omgivningstemperatur -40°C
Läckageklass A (EN 12266-1)

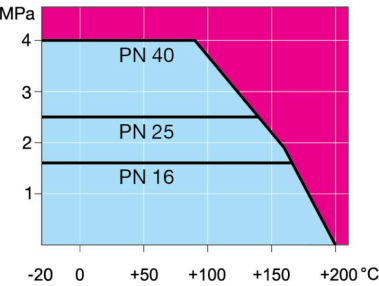


Ej för ånga

DN 65-150

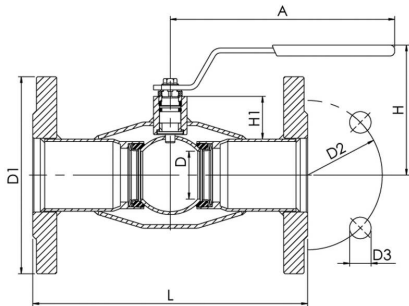

DN 200-250



DN	PN	Product no.	RSK no.	A	D	D1	D2	D3	H	H1	L	kg
65	16	233065	4500392	278	50	185.0	145.0	18.0	148	51	270	10.5
80	16	233080	4500393	278	65	200.0	160.0	18.0	160	58	280	12.0
100	16	233100	4500394	278	80	220.0	180.0	18.0	171	54	300	15.5
125	16	233125	4500395	400	100	250.0	210.0	18.0	220	68	325	21.0
150	16	233150	4500396	600	125	285.0	240.0	22.0	240	74	350	25.0
200	16	233200	4500397	870	150	340.0	295.0	22.0	281	92	400	50.0
250	16	233250	4500416	1200	200	405.0	355.0	26.0	343	108	550	90.0