


X-injusteringsventiler, stål, reducerat genomlopp

148X serie, X-serien, pressanslutning / pressanslutning, EN (DIN), DN 15-50 (18-54 mm), reducerat genomlopp

Ventilhus	DN 15-50 Stål, P235GH (1.0345)
Kula	DN 15-50 Rostfritt stål, X5CrNi18-10 (1.4301), kompositflödesrör
Kultätning	DN 15-50 PTFE+C
Spindel	DN 15-50 Rostfritt stål, X8CrNiS18-9 (1.4305)
Spindeltätning	DN 15-50 FPM
Mätuttag	DN 15-50 Självförslutande, mässing / EPDM
Manövrering	DN 15-50 med injusteringsratt
Pressanslutnings	DN 15-50 CIIR
O-ring (LBP)	

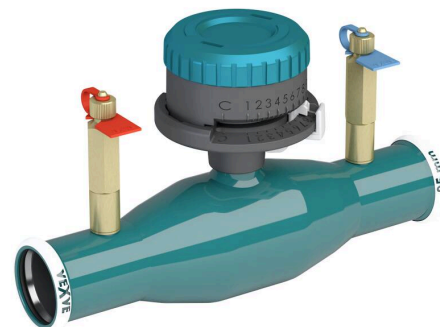


Funktionsvillkor

-20 °C – +120 °C

Under -20 °C kontakta tillverkaren


Lägsta tillåtna omgivningstemperatur -40°C

Läckageklass A (EN 12266-1)

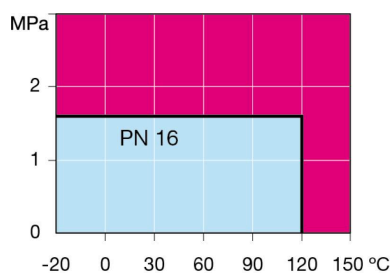

Ej för ånga

DN 15-50

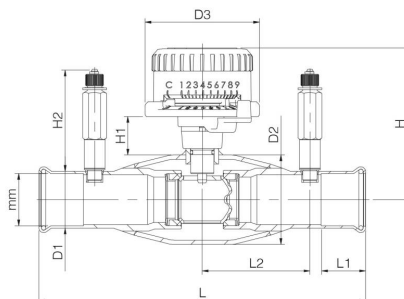

DN	PN	Product no.	RSK no.	mm	D1	D2	D3	H	H1	H2	L	L1	L2	kg
15	16	148015X	4883156	18	21.3	33.7	77.0	91	28	72	220	25	73	0.9
20	16	148020X	4883157	22	25.4	42.4	77.0	95	28	72	220	25	73	1.0
25	16	148025X	4883158	28	31.4	48.3	77.0	99	29	72	220	25	73	1.2
32	16	148032X	4883159	35	35.2	60.3	77.0	102	26	72	220	30	73	1.5
40	16	148040X	4883160	42	45.5	70.0	77.0	110	29	72	220	30	73	1.8
50	16	148050X	4883161	54	58.0	88.9	77.0	119	28	72	220	30	73	2.5

Vexves injusteringsventiler finns i biblioteken i TA-SCOPE och SmartBalancing-mätdon, bland annat.