

Injusteringsventiler, stål, reducerat genomlopp

143 serie, fläns / fläns, DN 65-150, reducerat genomlopp

Ventilhus	DN 65-150 Stål, P235GH (1.0345)
Kula	DN 65-150 Rostfritt stål, X5CrNi18-10 (1.4301)
Kultätning	DN 65-150 PTFE+GF
Spindel	DN 65-150 Rostfritt stål, X8CrNiS18-9 (1.4305)
Spindeltätning	DN 65-150 FPM
Mätuttag	DN 65-150 Typ Oras, mässing / NBR
Manövrering	DN 65-150 Med förzinkat stål handtag
Fläns	EN 1092-1
	Tillgänglig PN 10, 16, 25, 40



Funktionsvillkor

-20 °C - +200 °C

Under -20 °C kontakta tillverkaren


Lägsta tillåtna omgivningstemperatur -40°C

Läckageklass A (EN 12266-1)



Ej för ånga

DN 65-150

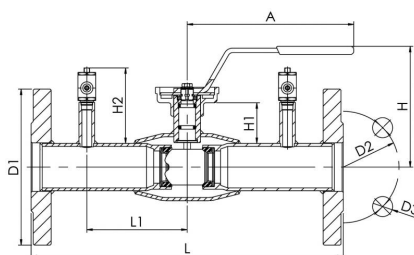

DN	PN	Product no.	RSK no.	A	D1	D2	D3	H	H1	H2	L	L1	kg
65	16	143065	4891327	280	185.0	145.0	18.0	160	58	108	310	110	10.5
80	16	143080	4891328	280	200.0	160.0	18.0	173	64	108	310	110	12.6
100	16	143100	4891329	280	220.0	180.0	18.0	219	98	132	350	122.5	17.5
125	16	143125	4891330	400	250.0	210.0	18.0	253	100	130	360	137,5	26.1
150	16	143150	4891331	600	285.0	240.0	22.0	276	110	131	370	150	34.6

Vexves injusteringsventiler finns i biblioteken i TA-SCOPE och SmartBalancing-mätdon, bland annat.

Injusteringsventiler, stål, reducerat genomlopp

14-3 serie, fläns / fläns, DN 200-300, reducerat genomlopp

Ventilhus	DN 200-300 Stål, P235GH (1.0345)
Kula	DN 200-300 Rostfritt stål, X5CrNi18-10 (1.4301)
Kultätning	DN 200-300 PTFE+GF
Spindel	DN 200-300 Rostfritt stål, X8CrNiS18-9 (1.4305)
Spindeltätning	DN 200-300 FPM
Mätuttag	DN 200-300 Typ Oras, mässing / NBR
Manövrering	DN 200-300 Ventil utrustad med manuell växel
Fläns	EN 1092-1
	Tillgänglig PN 10, 16, 25, 40




Funktionsvillkor

-20 °C - +200 °C

Under -20 °C kontakta tillverkaren


Lägsta tillåtna omgivningstemperatur -40°C

Läckageklass A (EN 12266-1)

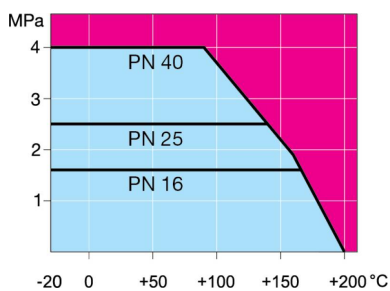


Ej för ånga

DN 200-300



DN 200-300



DN	PN	Product no.	RSK no.	A	B	C	D1	D2	D3	D4	E	H	H1	H2	L	L1	kg
200	16	143200	4891332	268	244	69	340.0	295.0	22.0	250.0	293		72	92	425	198	60.0
250	16	143250	4891333	301	294	97	405.0	355.0	26.0	300.0	345		88	97	550	259	114.0
300	16	143300	4891334	424	349	138	460.0	410.0	26.0	600.0	422		112	99	580	272	168.0

Vexves injusteringsventiler finns i biblioteken i TA-SCOPE och SmartBalancing-mätdon, bland annat.