


X-injusteringsventiler, rostfritt stål, reducerat genomlopp

248X serie, X-serien, pressanslutning / pressanslutning, EN (DIN), DN 15-50 (18-54 mm), reducerat genomlopp

Ventilhus	DN 15-50 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Kula	DN 15-50 Rostfritt stål, X2CrNiMo17-12-2 (1.4404), kompositflödesrör
Kultätning	DN 15-50 PTFE+C
Spindel	DN 15-50 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Spindeltätning	DN 15-50 FPM/NBR
Mätuttag	DN 15-50 Självförlutande, rostfritt stål, X8CrNiS18-9 (1.4305) / EPDM
Manövrering	DN 15-50 med injusteringsratt
Pressanslutnings	DN 15-50 CIIR
O-ring (LBP)	

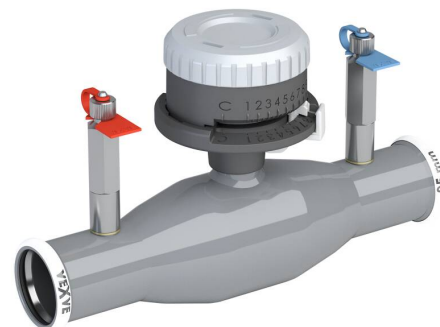


Funktionsvillkor

-20 °C – +120 °C

Under -20 °C kontakta tillverkaren


Lägst tillåtna omgivningstemperatur -40°C

Läckageklass A (EN 12266-1)

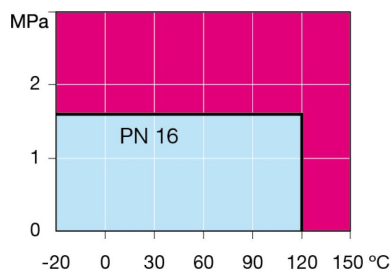

Ej för ånga

DN 10-50

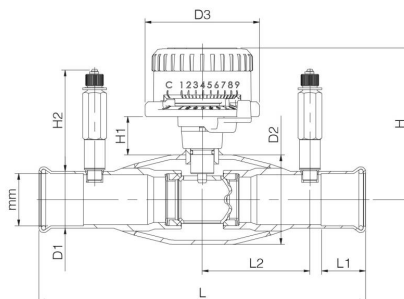

DN	PN	Product no.	RSK no.	mm	D1	D2	D3	H	H1	H2	L	L1	L2	kg
15	16	248015X	4883150	18	21.3	33.7	77.0	91	28	72	230	25	73	0.9
20	16	248020X	4883151	22	25.4	42.4	77.0	95	28	72	230	25	73	1.0
25	16	248025X	4883152	28	31.4	48.3	77.0	99	29	72	230	25	73	1.2
32	16	248032X	4883153	35	38.3	60.3	77.0	102	26	72	230	30	73	1.5
40	16	248040X	4883154	42	45.5	70.0	77.0	110	29	72	250	30	73	1.8
50	16	248050X	4883155	54	58.0	88.9	77.0	119	28	72	250	30	73	2.5

Vexves injusteringsventiler finns i biblioteken i TA-SCOPE och SmartBalancing-mätidon, bland annat.