


X-injusteringsventiler, rostfritt stål, reducerat genomlopp

240X/MM serie, X-serien, svetsning / svetsning, NS-norm, DN 20-50, reducerat genomlopp

Ventilhus	DN 20-50 Rostfritt stål, AISI316L (1.4404)
Kula	DN 20-50 Rostfritt stål, AISI316L (1.4404), kompositflödesrör
Kultätning	DN 20-50 PTFE+GF
Spindel	DN 20-50 Rostfritt stål, AISI316L (1.4404)
Spindeltätning	DN 20-50 FPM/NBR
Mätuttag	DN 20-50 Självförslutande, rostfritt stål, X8CrNiS18-9 (1.4305) / EPDM
Manövrering	DN 20-50 med injusteringsratt

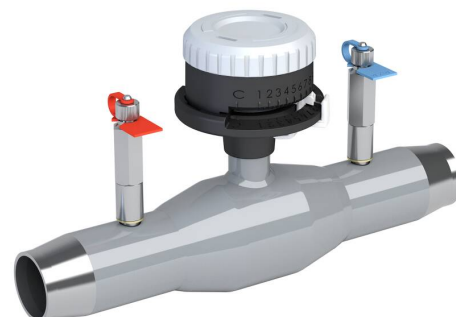


Funktionsvillkor

-20 °C – +120 °C

Under -20 °C kontakta tillverkaren


Lägsta tillåtna omgivningstemperatur -40°C

Läckageklass A (EN 12266-1)

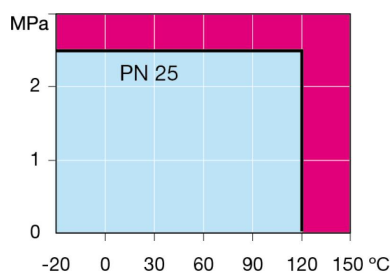

Ej för ånga

DN 20-50

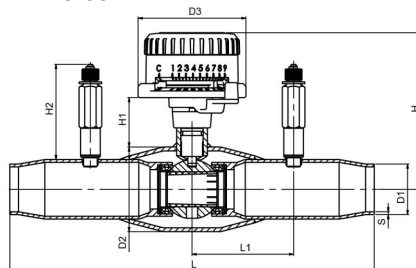

DN	PN	Product no.	RSK no.	D1	D2	D3	H	H1	H2	L	L1	S	kg
20	25	240020X/MM	5495437	25.0	42.4	77.0	101	38	68	230	73	2	1.1
25	25	240025X/MM	5495438	30.0	48.3	77.0	108	37	68	230	73	2	1.3
32	25	240032X/MM	5495439	36.0	60.3	77.0	112	35	68	260	73	2	1.9
40	25	240040X/MM	5495440	45.0	70.0	77.0	116	35	68	260	73	2.5	2.5
50	25	240050X/MM	5495441	54.0	76.1	77.0	123	39	68	300	73	2.6	3.6

Vexves injusteringsventiler finns i biblioteken i TA-SCOPE och SmartBalancing-mätdon, bland annat.