

Rostfria ståkulventiler, reducerat genomlopp

234 serie, svetsning / svetsning, EN (DIN), DN 100-250, reducerat genomlopp

Ventilhus	DN 100-250 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Kula	DN 100-250 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Kultätning	DN 100-250 PTFE+C
Spindel	DN 100-250 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Spindeltätning	DN 100-250 FPM/NBR
Manövrering	DN 100-250 Ventil utrustad med manuell växel



Funktionsvillkor

-20 °C - +200 °C

Under -20 °C kontakta tillverkaren


Lägsta tillåtna omgivningstemperatur -40°C

Läckageklass A (EN 12266-1)




Ej för ånga

DN 100-250

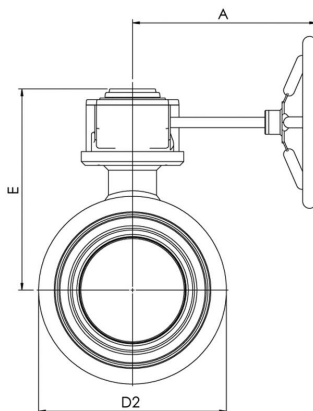

DN 100-250

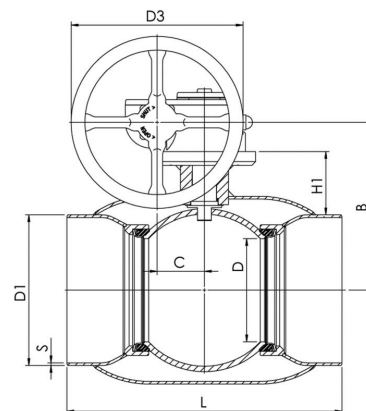

DN	PN	Product no.	RSK no.	A	B	C	D	D1	D2	D3	E	H1	L	S	kg
100	25	234100	4500514	187	159	53	80	114.3	139.7	125.0	202	68	325	3,0	13.0
125	25	234125	4500515	224	183	53	100	139.7	178.0	200.0	225	79	325	4,0	20.0
150	25	234150	4500383	224	203	53	125	168.3	219.1	200.0	246	85	350	4,0	23.0
200	25	234200	4500384	268	244	69	150	219.1	273.0	250.0	293	92	400	4,0	40.0
250	25	234250	4500516	301	294	97	200	273.0	355.6	300.0	345	108	530	4,0	77.0