

X-rostfria stålkulventiler, reducerat genomlopp

238X serie, X-serien, pressanslutning / pressanslutning, EN (DIN), DN 15-50 (18-54 mm), reducerat genomlopp

Ventilhus	DN 15-50 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Kula	DN 15-50 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Kultätning	DN 15-50 PTFE+C
Spindel	DN 15-50 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Spindeltätning	DN 15-50 FPM/NBR
Manövrering	DN 15-50 med komposithandtag
Pressanslutnings	DN 15-50 CIIR
O-ring (LBP)	




Funktionsvillkor

-20 °C – +120 °C

Under -20 °C kontakta tillverkaren


Lägstå tillåtna omgivningstemperatur -40°C

Läckageklass A (EN 12266-1)

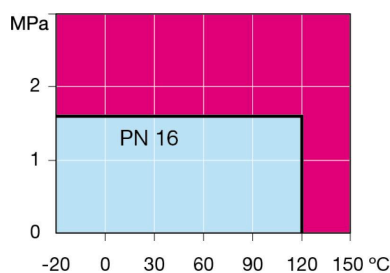

Ej för ånga

DN 15-50

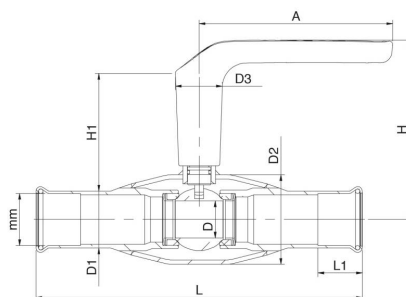

DN	PN	Product no.	RSK no.	mm	A	D	D1	D2	D3	H	H1	L	L1	kg
15	16	238015X	5494361	18	130	10	21.3	33.7	32.0	108	75	230	25	0.6
20	16	238020X	5494362	22	130	15	25.4	42.4	32.0	112	77	230	25	0.8
25	16	238025X	5494363	28	130	20	31.4	48.3	32.0	116	78	230	25	1.0
32	16	238032X	5494364	35	130	25	38.3	60.3	32.0	121	79	230	30	1.3
40	16	238040X	5494365	42	130	32	45.5	70.0	32.0	128	84	250	30	1.5
50	16	238050X	5494366	54	130	50	58.0	76.1	32.0	136	84	250	30	2.3