

# X-rostfria stålkulventiler, reducerat genomlopp

238X serie, X-serien, pressanslutning / pressanslutning, EN (DIN), DN 15-50 (18-54 mm), reducerat genomlopp

|                  |                                                   |
|------------------|---------------------------------------------------|
| Ventilhus        | DN 15-50 Rostfritt stål, X2CrNiMo17-12-2 (1.4404) |
| Kula             | DN 15-50 Rostfritt stål, X2CrNiMo17-12-2 (1.4404) |
| Kultätning       | DN 15-50 PTFE+C                                   |
| Spindel          | DN 15-50 Rostfritt stål, X2CrNiMo17-12-2 (1.4404) |
| Spindeltätning   | DN 15-50 FPM/NBR                                  |
| Manövrering      | DN 15-50 med komposithandtag                      |
| Pressanslutnings | DN 15-50 CIIR                                     |
| O-ring (LBP)     |                                                   |




## Funktionsvillkor

-20 °C – +120 °C

Under -20 °C kontakta tillverkaren


Lägsta tillåtna omgivningstemperatur -40°C

Läckageklass A (EN 12266-1)

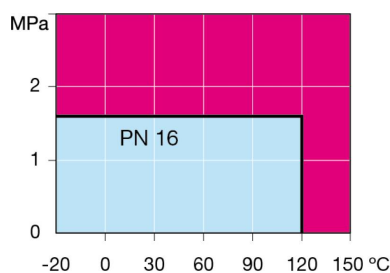

Ej för ånga

DN 15-50

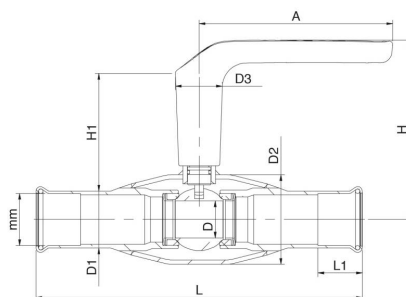

| DN | PN | Product no. | RSK no. | mm | A   | D  | D1   | D2   | D3   | H   | H1 | L   | L1 | kg  |
|----|----|-------------|---------|----|-----|----|------|------|------|-----|----|-----|----|-----|
| 15 | 16 | 238015X     | 5494361 | 18 | 130 | 10 | 21.3 | 33.7 | 32.0 | 108 | 75 | 220 | 25 | 0.6 |
| 20 | 16 | 238020X     | 5494362 | 22 | 130 | 15 | 25.4 | 42.4 | 32.0 | 112 | 77 | 220 | 25 | 0.8 |
| 25 | 16 | 238025X     | 5494363 | 28 | 130 | 20 | 31.4 | 48.3 | 32.0 | 116 | 78 | 220 | 25 | 1.0 |
| 32 | 16 | 238032X     | 5494364 | 35 | 130 | 25 | 38.3 | 60.3 | 32.0 | 121 | 79 | 220 | 30 | 1.3 |
| 40 | 16 | 238040X     | 5494365 | 42 | 130 | 32 | 45.5 | 70.0 | 32.0 | 128 | 84 | 220 | 30 | 1.5 |
| 50 | 16 | 238050X     | 5494366 | 54 | 130 | 50 | 58.0 | 76.1 | 32.0 | 136 | 84 | 220 | 30 | 2.3 |